




PNEUMATIC TORQUE WRENCHES

STRAIGHT VERSION

- Rotary drive 360°
- Rotation switch clockwise/ anticlockwise
- Stepless torque adjustment
- Included: pneumatic torque wrench, reaction arm, adjusting unit with spiral air duct, metal carry case, calibration certificate and torque table.

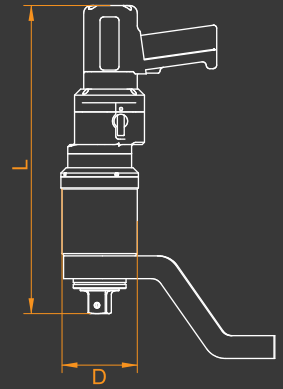

PRODUCT DESCRIPTION

The torque in the pneumatic torque wrenches (nutrunners) is set in the air preparation unit according to the set torque values. They are fast, precise and safe. Included: pneumatic nutrunner, reaction arm, regulating unit with spiral air tube, metal carry case. Direction switch (screw / unscrew). Accuracy $\pm 3.5\%$. It is possible to produce a pneumatic nutrunner for individual customer needs. The rotary 360° drive makes work extremely comfortable (convenient position). Tools manufactured in Poland by BEWO-TECH.


Type	Range [Nm]	Drive [square]	Diameter D [mm]	Length L [mm]	Reaction weight [kg]	Total weight [kg]	Speed [rpm]
BP-850	40-850	3/4" lub 1"	78	360	2,9	6	19
BP-1200	40-1200	1"	87	360	2,9	6,8	19
BP-2500	70-2500	1"	87	390	2,9	7	7,5
BP-3500	70-3500	1 1/2"	87	400	4,7	8,2	7,5
BP-5000	130-5000	1 1/2"	99	410	4,7	10,5	3,5
BP-6000	150-6000	1 1/2"	99	410	4,7	10,5	2,8
BP-10000	450-10000	1 1/2"	122	455	9,2	15,5	1,8
BP-12000	600-12000	1 1/2"	122	455	9,2	15,5	1,8



PNEUMATIC TORQUE WRENCHES

ANGLED VERSION

- Rotary drive 360° horizontally and vertically,
- Stepless torque adjustment
- Rotation switch left and right
- Included: pneumatic torque wrench, reaction arm, adjusting unit with spiral air duct, metal carry case, calibration certificate and torque table.

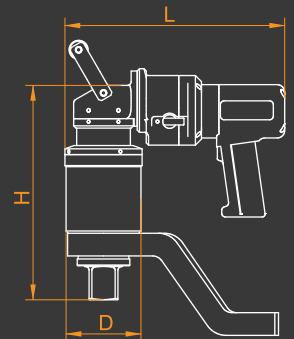

PRODUCT DESCRIPTION

The torque in the pneumatic torque wrenches (nutrunners) is set in the air preparation unit according to the set torque values. They are fast, precise and safe. Included: pneumatic nutrunner, reaction arm, regulating unit with spiral air tube, metal carry case. Direction switch (screw / unscrew). Accuracy $\pm 3.5\%$. It is possible to produce a pneumatic nutrunner for individual customer needs. The reversible two-way drive (360°) makes the job extremely comfortable (convenient positioning). Tools manufactured in Poland by BEWO-TECH.

Type	Range [Nm]	Drive [square]	Diameter D [mm]	Length L [mm]	Height H [mm]	Reaction weight [kg]	Total weight [kg]	Speed [rpm]
BPK-850	40-850	3/4" lub 1"	78	261	234	2,9	7,5	19
BPK-1200	40-1200	1"	87	267	234	2,9	8,1	19
BPK-2500	70-2500	1"	87	267	264	2,9	9	7,5
BPK-3500	70-3500	1 1/2"	87	267	274	4,7	10,2	7,5
BPK-5000	130-5000	1 1/2"	99	274	284	4,7	12,5	3,5
BPK-6000	150-6000	1 1/2"	99	274	284	4,7	12,5	2,8
BPK-10000	450-10000	1 1/2"	122	285	330	9,2	17,5	1,8
BPK-12000	600-12000	1 1/2"	122	285	330	9,2	17,5	1,8