

CT | SELF-CONTAINED HYDRAULIC CUTTERS




Cutting capacity up to 40 mm diameter

Cuts a wide variety of materials

Compact and lightweight

- ▶ High quality tool steel cutting blades
- ▶ Incorporates an integral hydraulic pump for easy operation
- ▶ Ergonomic grip handles for reduced operator effort
- ▶ Suitable for cutting steel wire rope, round bar, wire strands and cables

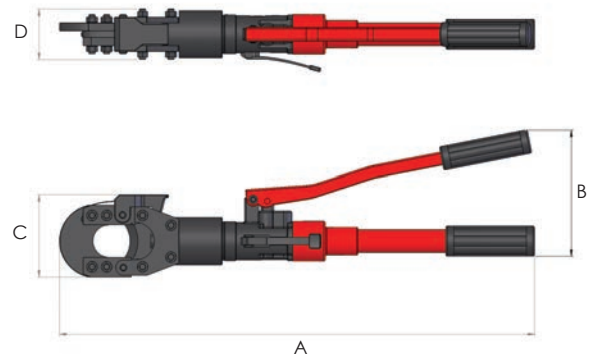

| Model number | Cutting force (tonnes) | Weight (kg) | Dimensions (mm) | | | |
|--------------|------------------------|-------------|-----------------|-----|-----|----|
| | | | A | B | C | D |
| CT20 | 5 | 2.8 | 390 | 145 | 76 | 40 |
| CT40 | 7 | 6.0 | 560 | 155 | 103 | 65 |

| Material | Description | Maximum diameter cutting capacity (mm) | |
|-----------------|-----------------------------|--|------|
| | | CT20 | CT40 |
| Steel Wire Rope | 6 x 7 Hempcore | 16 | 20 |
| | 6 x 12 Hempcore | 20 | 25 |
| | 6 x 19 Hempcore | 20 | 25 |
| Round Bar | Soft copper bar | 20 | 25 |
| | Soft aluminium bar | 20 | 25 |
| | Soft steel bar (below SS41) | 16 | 16 |
| Wire Strands | Bare copper strands | 20 | 40 |
| | Bare aluminium strands | 20 | 40 |
| Cable | Armoured underground cable | 20 | 40 |

Replacement blades for CT self-contained cutter models:

| Blade part number | Blade type | For cutter |
|-------------------|------------|------------|
| CT20-04 | Moving | CT20 |
| CT20-05 | Static | CT20 |
| CT40-11 | Moving | CT40 |
| CT40-05 | Static | CT40 |